

Chapter B16 – Waste Minimisation and Prevention

APPENDICES

Appendix A: Site Waste Minimisation and Management Plan Template

Applicant and Project Details (All Developments)	
Applicant Details	
Application No.	
Name	
Address	
Phone number(s)	
Email	
Project Details	
Address of development	
Existing buildings and other structures currently on the site	
Description of proposed development	
<p><i>This development achieves the waste objectives set out in the DCP2013 Chapter B16. The details on this form are the provisions and intentions for minimising waste relating to this project. All records demonstrating lawful disposal of waste will be retained and kept readily accessible for inspection by regulatory authorities such as council, DECC or WorkCover NSW.</i></p>	
Name	
Signature	
Date	

Demolition (All Types of Developments)**Address of development:** _____

	Reuse	Recycling	Disposal	
Type of waste generated	Estimate Volume (m³) or Weight (t)	Estimate Volume (m³) or Weight (t)	Estimate Volume (m³) or Weight (t)	Specify method of on site reuse, contractor and recycling outlet and /or waste depot to be used
Excavation material				
Timber (specify)				
Concrete				
Bricks/pavers				
Tiles				
Metal (specify)				
Glass				
Furniture				
Fixtures and fittings				
Floor coverings				
Packaging (used pallets, pallet wrap)				
Garden organics				
Containers (cans, plastic, glass)				
Paper/cardboard				
Residual waste				
Hazardous/special waste e.g. asbestos (specify)				
Other (specify)				

Construction (All Types of Developments)**Address of development:** _____

	Reuse	Recycling	Disposal	
Type of waste generated	Estimate Volume (m³) or Weight (t)	Estimate Volume (m³) or Weight (t)	Estimate Volume (m³) or Weight (t)	Specify method of on site reuse, contractor and recycling outlet and/or waste depot to be used
Excavation material				
Timber (specify)				
Concrete				
Bricks				
Tiles				
Metal (specify)				
Glass				
Plasterboard (offcuts)				
Fixtures and fittings				
Floor coverings				
Packaging (used pallets, pallet wrap)				
Garden organics				
Containers (cans, plastic, glass)				
Paper/cardboard				
Residual waste				
Hazardous/special waste (specify)				

Ongoing Operation (Residential, Multi Unit, Commercial, Mixed Use and Industrial)

Address of development: _____

Show the total volume of waste expected to be generated by the development and the associated waste storage requirements.

	Recyclables		Compostables	Residual waste*	Other
	Paper/ cardboard	Metals/ plastics/glass			
Amount generated (L per unit per day)					
Amount generated (L per development per week)					
Any reduction due to compacting equipment					
Frequency of collections (per week)					
Number and size of storage bins required					
Floor area required for storage bins (m ²)					
Floor area required for manoeuvrability (m ²)					
Height required for manoeuvrability (m)					

* Current "non-recyclables" waste generation rates typically include food waste that might be further separated for composting.

Construction Design (All Types of Developments)

Outline how measures for waste avoidance have been incorporated into the design, material purchasing and construction techniques of the development:

Materials

Lifecycle

Detail the arrangements that would be appropriate for the ongoing use of waste facilities as provided in the development. Identify each stage of waste transfer between residents' units/commercial tenancies and loading into the collection vehicle, detailing the responsibility for and location and frequency of, transfer and collection.

Plans and Drawings (All Developments)

The following checklists are designed to help ensure SWMMPs are accompanied by sufficient information to allow assessment of the application.

Drawings are to be submitted to scale, clearly indicating the location of and provisions for the storage and collection of waste and recyclables during:

- demolition
- construction
- ongoing operation.

Demolition

Do the site plans detail/indicate:

	Tick Yes
Size and location(s) of waste storage area(s)	
Access for waste collection vehicles	
Areas to be excavated	
Types and numbers of storage bins likely to be required	
Signage required to facilitate correct use of storage facilities	

Construction

Do the site plans detail/indicate:

	Tick Yes
Size and location(s) of waste storage area(s)	
Access for waste collection vehicles	
Areas to be excavated	
Types and numbers of storage bins likely to be required	
Signage required to facilitate correct use of storage facilities	

Ongoing Operation

Do the site plans detail/indicate:

	Tick Yes
Space	
Size and location(s) of waste storage areas	
Recycling bins placed next to residual waste bins	
Space provided for access to and the manoeuvring of bins/equipment	
Any additional facilities	
Access	
Access route(s) to deposit waste in storage room/area	
Access route(s) to collect waste from storage room/area	
Bin carting grade	
Location of final collection point	
Clearance, geometric design and strength of internal access driveways and roads	
Direction of traffic flow for internal access driveways and roads	
Amenity	
Aesthetic design of waste storage areas	
Signage – type and location	
Construction details of storage rooms/areas (including floor, walls, doors, ceiling design, sewer connection, lighting, ventilation, security, wash down provisions etc)	

Appendix B: Waste/Recycling Generation Rates

Construction Waste

'Rule of Thumb' for renovations and small home building

- Timber 5-7% of material ordered
- Plasterboard 5-20% of material ordered
- Concrete 3-5% of material ordered
- Bricks 5-10% of material ordered
- Tiles 2-5% of material ordered

Source: *Waste Planning Guide for Development Application, Inner Sydney Waste Board, 1998*

Ongoing Operation

Premises type	Waste generation	Recyclable material generation
Backpackers' Hostel	40L/occupant space/week	20L/occupant space/week
Boarding House, Guest House	60L/occupant space/week	20L/occupant space/week
Food premises: Butcher Delicatessen Fish Shop Greengrocer Restaurant, Café Supermarket Takeaway food shop	80L/100m ² floor area/day 80L/100m ² floor area/day 80L/100m ² floor area/day 240L/100m ² floor area/day 10L/1.5m ² floor area/day 240L/100m ² floor area/day 80L/100m ² floor area/day	Variable Variable Variable 120L/100m ² floor area/day 2L/1.5m ² floor area/day 240L/100m ² floor area/day Variable
Hairdresser, Beauty Salon	60L/100m ² floor area/week	Variable
Hotel, Licensed Club, Motel	5L/bed space/day 50L/100m ² bar area/day 10L/1.5m ² dining area/day	1L/bed space/day 50L/100m ² bar area/day 50L/100m ² dining area/day
Offices	10L/100m ² floor area/day	10L/100m ² floor area/day
Shop less than 100m ² floor area Shop greater than 100m ² floor area	50L/100m ² floor area/day 50L/100m ² floor area/day	25L/100m ² floor area/day 50L/100m ² floor area/day
Showroom	40L/100m ² floor area/day	10L/100m ² floor area/day
Multi-Unit Dwellings ¹	80L/unit/week	40L/unit/week

Sources: Adapted from *Waverley Council Code for the Storage and Handling of Waste*.

¹ Appendix A, *Better Practice Guide For Waste Management In Multi-Unit Dwellings 2007*

Appendix C: Indicative Bin Sizes

Bin type	Height	Depth	Width
80 Litre Bin	870mm	530mm	450mm
120 Litre Bin	940mm	560mm	485mm
140 Litre Bin	1065mm	540mm	500mm
240 Litre Bin	1080mm	735mm	580mm

These dimensions are only a guide and differ slightly according to manufacturer, if bins have flat or dome lids and are used with different lifting devices.

Appendix D: Waste Recycling/Storage Rooms in Multi-Unit Dwellings

Building Code of Australia

Waste/recycling storage rooms must be constructed in accordance with the requirements of the *Building Code of Australia (BCA)*.

Location and Appearance

- Waste/recycling storage rooms must be integrated into the design of the overall development. It is preferable that such rooms be located behind the front building line. Wherever possible, the room should be in a basement location within the main building envelope (rather than a separate stand-alone structure). Materials and finishes visible from outside should be similar in style and quality to the external materials used in the rest of the development.
- Waste/recycling storage rooms must be located and designed in a manner that reduces adverse impacts upon the inhabitants of any dwellings on the site and upon neighbouring properties. The location and design of the room should minimise adverse impacts associated with:
 - the proximity of the room to any dwellings
 - the visibility of the room
 - noise generated by any equipment located within the room
 - noise generated by the movement of bins into and out of the room
 - noise generated by collection vehicles accessing the site; and
 - odours emanating from the room.

Size

- Waste/recycling storage rooms must be of adequate size to comfortably accommodate all waste and recycling bins associated with the development.

Layout

The gradient of waste/recycling storage room floors and the gradient of any associated access ramps must be sufficiently level so that access for the purpose of emptying containers can occur in accordance with WorkCover NSW Occupational Health and Safety requirements.

Within waste/recycling storage rooms, containers used for the storage of recyclable materials should be kept separate from (but close to) general waste containers — so that the potential for contamination of recyclable materials is minimised.

Appendix E: Garbage Truck Dimensions for Residential Waste Collection

This page includes information regarding the dimensions of garbage trucks that are typically used for the collection of residential waste. Developments that require Council garbage trucks to enter the site for the collection of residential waste must be designed to accommodate on-site truck movement.

Requirements regarding vehicle turning circles and driveway width/gradient are contained in *Australian Standard 2890.2 2002/Planning Facilities — Off Street Commercial Vehicles*.

It is recommended that an applicant speak with Council’s Waste Services Coordinator in regards to the design of development proposals that involve garbage trucks entering the site. Services will not be provided where there are undue risks.

Typical Council Garbage Truck used for Domestic Waste Collection	
Length overall	8.0 metres
Width overall	2.5 metres
Operational height	4.3 metres
Travel height	4.3 metres
Weight (vehicle and load)	22.5 tonnes
Weight (vehicle only)	13 tonnes
Turning Circle	25.0 metres

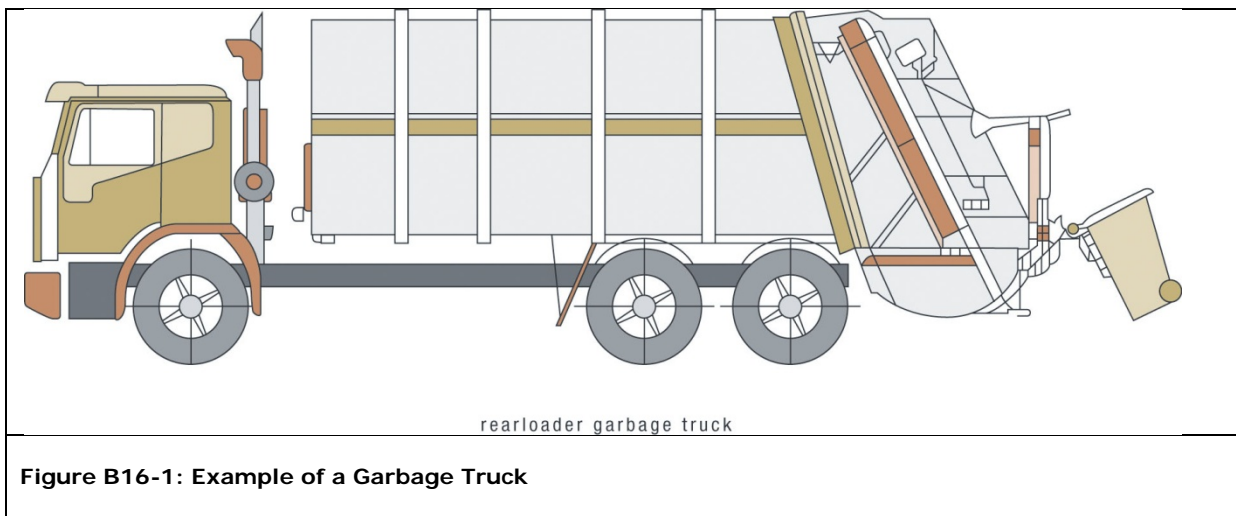


Figure B16-1: Example of a Garbage Truck

Appendix F: Garbage Chutes

Garbage chute design

- Garbage chutes must be constructed in accordance with the requirements of the *Building Code of Australia (BCA)*.
- Garbage chutes must be located and insulated in a manner that reduces noise impacts.
- Chutes, service openings and charging devices must be constructed of material (such as metal) that is smooth, durable, impervious, non-corrosive and fire resistant.
- Chutes, service openings and charging devices must be capable of being easily cleaned.
- Chutes must be cylindrical and should have a diameter of at least 500mm.
- There must not be any bends (or sections of reduced diameter) in the main shaft of the chute.
- Internal overlaps in the chute must follow the direction of waste flow.
- Chutes must deposit rubbish directly into a bin or compactor located within a waste/recycling storage room.
- A cut-off device must be located at or near the base of the chute so that the bottom of the chute can be closed when the bin or compacting device at the bottom of the chute is withdrawn or being replaced.
- The upper end of a chute should extend above the roofline of the building.
- The upper end of a chute should be weather protected in a manner that doesn't impede the upward movement of air out of the chute.

Garbage chute service room design

- The service opening (for depositing rubbish into the main chute) on each floor of the building must be located in a dedicated service room.
- The charging device for each service opening must be self-closing and must not project into the main chute.
- Branches connecting service openings to the main chute are to be no more than 1m long.
- Each service room must include containers for the storage of recyclable materials. Signage regarding the materials that can be recycled should be displayed near these containers.
- Each service room must be located for convenient access by users and must be well ventilated and well lit.
- The floors, walls and ceilings of service rooms must be finished with smooth, durable materials that are capable of being easily cleaned.
- Service rooms must include signage that clearly describes the types of materials that can be deposited into the garbage chute and the types of materials which should be deposited into recycling bins.

Management

- Garbage chutes are not to be used for the disposal of recyclable materials. Signage to this effect should be displayed near service openings.
- Arrangements must be in place for the regular maintenance and cleaning of garbage chutes and any associated service rooms, service openings and charging devices.
- Arrangements must be in place for the regular transferral of recyclable materials (which are stored in service rooms) to the main waste/recycling storage room.

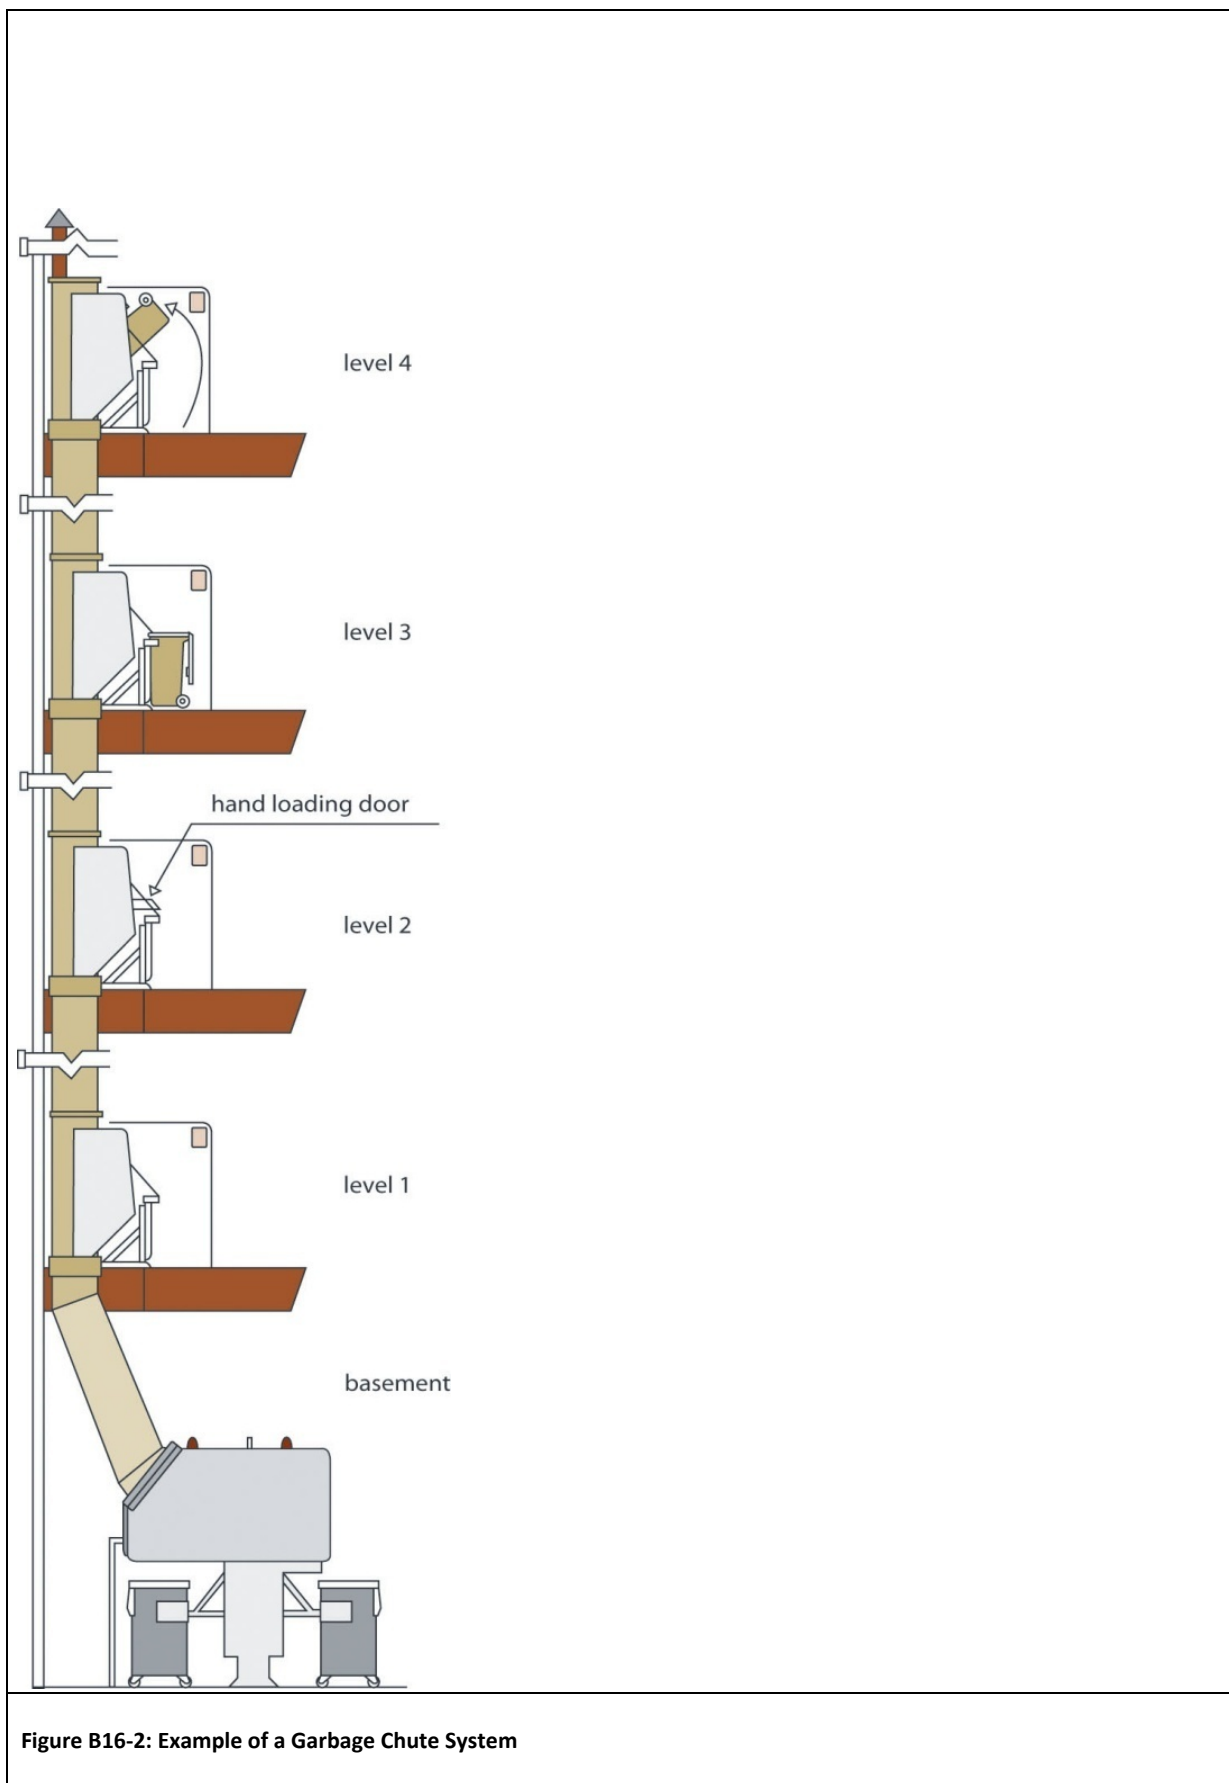


Figure B16-2: Example of a Garbage Chute System

Appendix G: Commercial/Industrial Waste and Recycling Storage Areas

Building Code of Australia

- Waste/recycling storage areas must be constructed in accordance with the requirements of the Building Code of Australia (BCA).

Location and appearance

- Waste/recycling storage areas must be integrated into the design of the overall development. Materials and finishes that are visible from outside should be similar in style and quality to the external materials used in the rest of the development.
- Waste/recycling storage areas must be located and designed in a manner that reduces adverse impacts upon neighbouring properties and the streetscape. The location and design of the areas should minimise adverse impacts associated with:
 - the proximity of the area to dwellings
 - the visibility of the area
 - noise generated by any equipment located within the area
 - noise generated by the movement of bins into and out of the area
 - noise generated by collection vehicles accessing the site; and
 - odours emanating from the area.

Size

- Waste/recycling storage areas must be of adequate size to comfortably accommodate all waste and recycling bins associated with the development.
- Waste/recycling storage areas must be able to accommodate separate general waste bins and recycling bins which are of sufficient volume to contain the quantity of waste generated (at the rate described in **Appendix B**) between collections.

Layout

- The gradient of waste/recycling storage area floors and the gradient of any associated access ramps must be sufficiently level so that access for the purpose of emptying containers can occur in accordance with WorkCover NSW Occupational Health and Safety requirements.
- Within waste/recycling storage areas, containers used for the storage of recyclable materials should be kept separate from (but close to) general waste containers — so that the potential for contamination of recyclable materials is minimised.

Access: waste/recycling collection

- The development must be designed to allow access by collection vehicles used by the nominated waste contractor. Wherever possible, the site must be configured to allow collection vehicles to enter and exit the site in a forward direction and so collection vehicles do not impede general access to, from and within the site. Access driveways to be used by collection vehicles must be of sufficient strength to support such vehicles.
- Servicing arrangements for the emptying of bins must be compatible with the operation of any other loading/unloading facilities on-site.
- Access for the purpose of emptying waste/recycling storage containers must be able to occur in accordance with WorkCover NSW Occupational Health and Safety requirements.

Access: general

- In commercial development, public buildings and industrial development, there must be convenient access from each tenancy to the waste/recycling storage area(s). There must be step-free access between the point at which bins are collected/emptied and the waste/recycling storage area(s).
- Arrangements must be in place so that the waste/recycling storage area is not accessible to the general public.
- Vermin must be prevented from entering the waste/recycling storage area.

Surfaces

- Waste/recycling storage areas must have a smooth, durable floor and must be enclosed with durable walls/fences that extend to the height of any containers which are kept within.

Doors/gates

- Doors/gates to waste/recycling storage areas must be durable. There must be a sign adjacent to the door/gate that indicates that the door/gate is to remain closed when not in use. All doors/gates are to be openable from both inside and outside the storage area and must be wide enough to allow for the easy passage of waste/recycling containers.

Services

- Waste/recycling storage areas must be serviced by hot and cold water provided through a centralised mixing valve. The hose cock must be protected from the waste containers and must be located in a position that is easily accessible when the area is filled with waste containers.
- The floor must be graded so that any water is directed to a sewer authority approved drainage connection located upon the site. In the SMA this is Sydney Water.

Signage

- Waste/recycling storage areas must include signage that clearly describes the types of materials that can be deposited into recycling bins and general garbage bins.

Management

- Arrangements must be in place for the regular maintenance and cleaning of waste/recycling storage areas. Waste/recycling containers must only be washed in an area which drains to a sewer authority approved drainage connection. In the SMA this is Sydney Water.
- The *Better Practice Guide for Waste Management in Multi-Unit Dwellings* gives detailed information about waste recycling/storage rooms and facilities. The Guide was substantially reviewed in 2007 and is available on the Department of Environment and Climate Change NSW website (www.environment.nsw.gov.au). Further updates will be published as further information from social research and waste stream audits becomes available.